

SIRAX CT3xx

Split-Core Current Transformer

Description

Thanks to their compact design, simple installation and splittable core halves, split-core current transformers are ideal for use in hard-to-reach and limited space applications. Anywhere where an interruption of the current path is problematic or a measuring instrument has to be retrofitted, split-core current transformers are the right choice. They convert primary rated currents into secondary, rated currents of 5 A or 1 A, which can be used by measuring systems.

Properties

- Burst-resistant plastic housing made from polycarbonate
- Hardly inflammable and self-extinguishing according to UL94 VO
- Manipulation protection of the connections by means of sealable covers
- Lock protection prevents accidental opening
- Use in difficult to reach places with limited space requirement
- Easy and quick assembly thanks to the splittable core halves
- Ideal for retrofitting in existing systems without interrupting the power supply
- Various mounting options such as wall, cable or busbar mounting

Technische Daten

	SIRAX CT300	SIRAX CT310	SIRAX CT320	SIRAX CT330
Dimensions inside	23 x 33 mm	55 x 85 mm	55 x 125 mm	85 x 172 mm
Width / Height / depth	93 / 106 / 40 mm	125 / 158 / 40 mm	155 / 198 / 40 mm	195 / 245 / 40 mm
Primary current I_{pr}	100 A ... 400 A	250 A ... 2000 A	1600 A ... 3000 A	2500 A ... 5000 A
Secondary current I_{sr}			5 A or 1 A	
Class of accuracy	0.5; 1	0.5	0.5	0.5
Test voltage		4 kV; 50 Hz; 1 min		
Nominal frequency		50 ... 60 Hz		
Rated insulation level U_m		0.72 kV		
Rated power S_r		1 ... 20 VA		
Thermal short circuit current I_{th}		60 x I_N		
Dynamic short circuit current I_{dyn}		2.5 x I_{th}		
Insulation class		E (max. 120 °C)		
Instrument security factor FS		FS10; FS15; FS30		
Housing material		Polycarbonate		
Flammability class		UL94 V-0, self-extinguishing, non-dripping, halogen-free		
Body protection IP		IP20		
Ambient temperature		-20 °C ... +45 °C		
Standard accepted		IEC 61869-1; IEC 61869-2		



Application

Application possibilities for split core current transformers can be found in almost all market segments and sectors. Wherever an adaptation of the primary measured variable to the input nominal size of the connected measuring devices is necessary. They are ideal for retrofitting in existing systems.


SIRAX CT3xx

Split-Core Current Transformer

Performance

Type of transformer	SIRAX CT300		SIRAX CT310	SIRAX CT320	SIRAX CT330
Accuracy class	0.5	1	0.5	0.5	0.5
Secondary currents	5 A and 1 A				
Primary currents	Rated power / Instrument security factor (FS)				
100 A	—	1.5 VA / FS10	—	—	—
150 A	—	1.75 VA / FS10	—	—	—
200 A	—	2.5 VA / FS10	—	—	—
250 A	—	3.75 VA / FS10	1 VA / FS10	—	—
300 A	2.5 VA / FS10	5 VA / FS10	2.5 VA / FS15 / FS10	—	—
400 A	3.75 VA / FS10	6.25 VA / FS10	2.5 VA / FS10	—	—
500 A	—	—	3.75 VA / FS10	—	—
600 A	—	—	5 VA / FS10	—	—
750 A	—	—	7.5 VA / FS10	—	—
800 A	—	—	7.5 VA / FS10	—	—
1000 A	—	—	10 VA / FS10	—	—
1200 A	—	—	10 VA / FS10	—	—
1250 A	—	—	10 VA / FS10	—	—
1500 A	—	—	10 VA / FS10	—	—
1600 A	—	—	10 VA / FS10	20 VA / FS10	—
2000 A	—	—	10 VA / FS10	20 VA / FS10	—
2500 A	—	—	—	25 VA / FS10	25 VA / FS30
3000 A	—	—	—	30 VA / FS10	30 VA / FS30
4000 A	—	—	—	—	30 VA / FS30
5000 A	—	—	—	—	30 VA / FS30

Dimensions

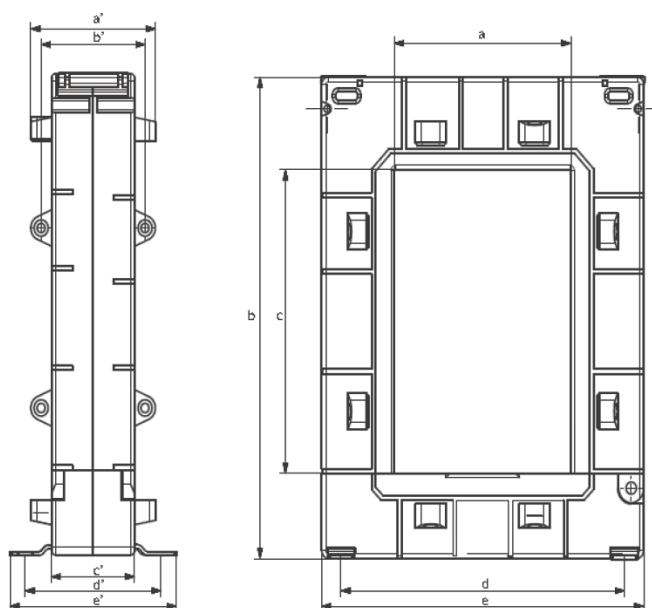

Model	Front view					Side view				
	a	b	c	d	e	a'	b'	c'	d'	e'
CT300	23	106	33	75	93	54	46	40	62	76
CT310	55	158	85	106	125	54	46	40	62	76
CT320	85	198	125	136	155	54	46	40	62	76
CT330	85	245	172	177	195	78	71	40	62	76

 **CAMILLE BAUER**

Camille Bauer Metrawatt AG
Aargauerstrasse 7
CH-5610 Wohlen / Switzerland
Telefon: +41 56 618 21 11
Telefax: +41 56 618 21 21
info@camillebauer.com
www.camillebauer.com